WCESD# 3
Fire Alarm Process Flow

SFMO Licensed Fire Alarm Contractor Chosen

↓

Submit Plans for Approval and Permit

↓

Plans Approved

No → Revise and Resubmit Plans

Yes ↓

Begin System Installation

→ Begin System Inspections →

Audible/Visual Device(s)

Horn/Strobe above FDC shall operate on waterflow only.

↓

Initiating Device(s)

↓

Water flow

↓

Central Station Monitoring

Waterflow activation shall annunciate as a waterflow alarm.

↓

Device Address Test

Addressable device designation and location required

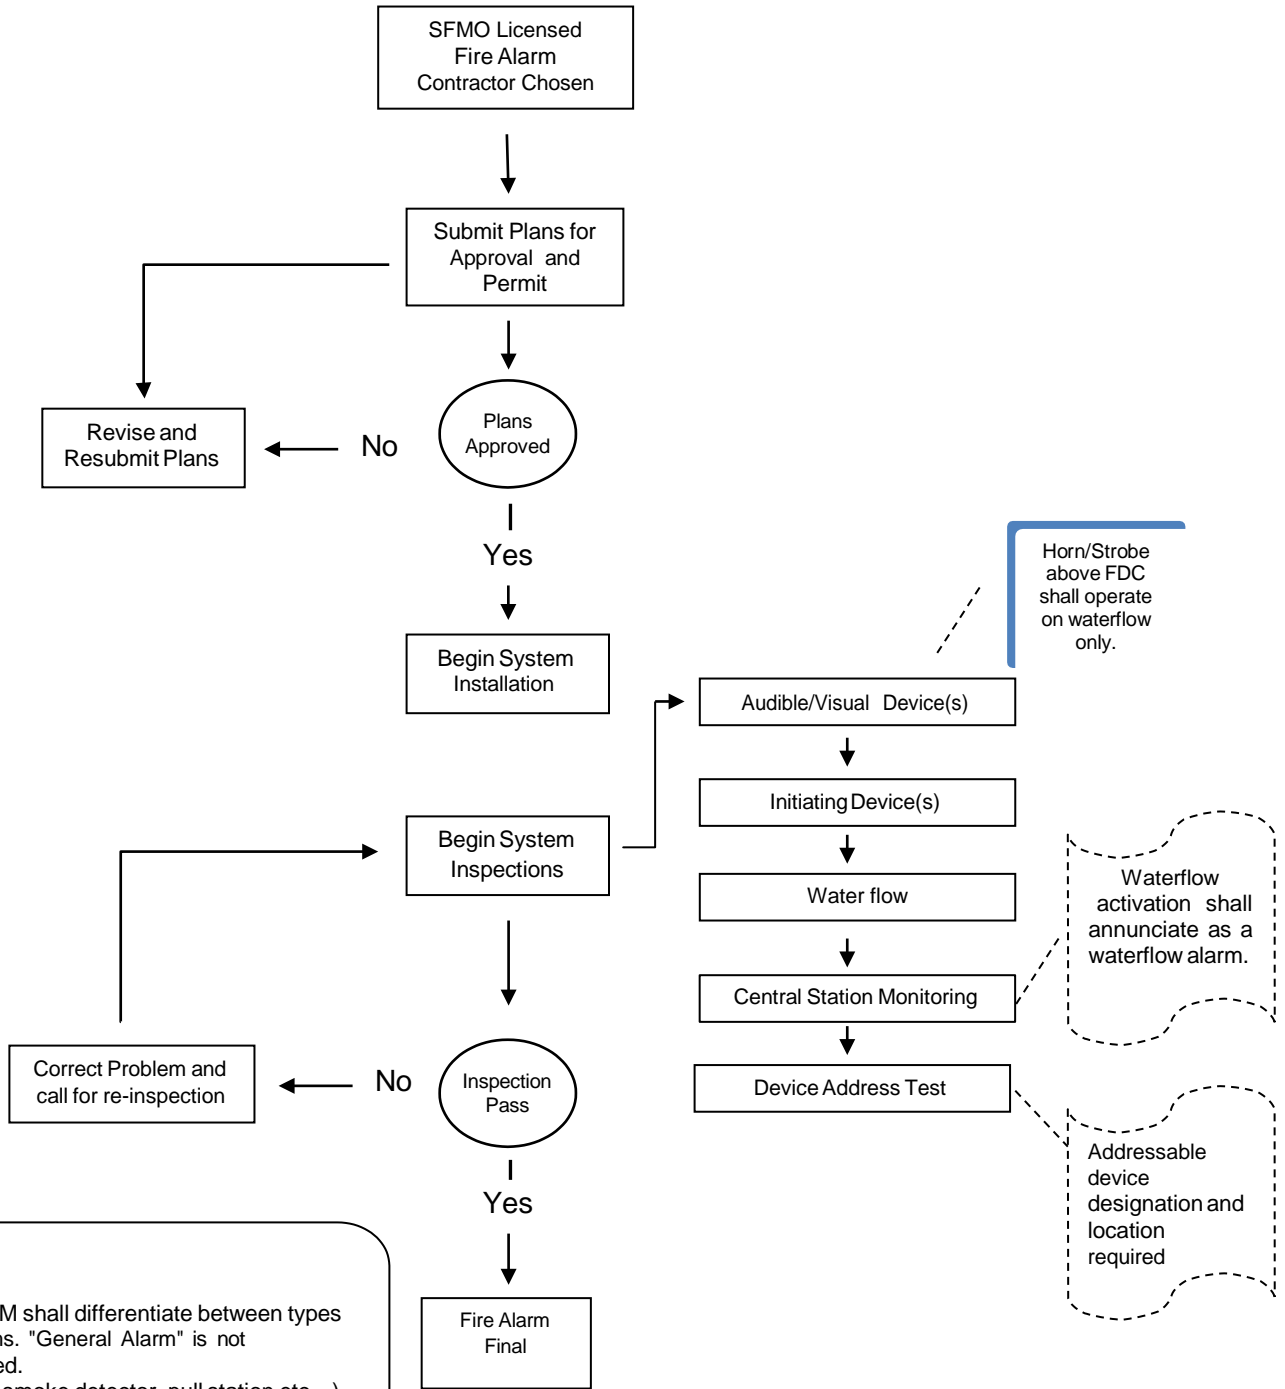Inspection Pass

No → Correct Problem and call for re-inspection

Yes ↓

Fire Alarm Final

NOTE:
The CSM shall differentiate between types of alarms. "General Alarm" is not permitted.
(waterflow alarm, smoke detector, pull station etc…)